

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2002 (28.02.2002)


PCT

(10) International Publication Number
WO 02/17549 A2

- (51) International Patent Classification⁷: H04L 1/00
- (21) International Application Number: PCT/IB01/01515
- (22) International Filing Date: 21 August 2001 (21.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/227,813 25 August 2000 (25.08.2000) US
- (71) Applicant and
(72) Inventor: KIRAN, T. [IN/IN]; #169, 7th 'D' main, 4th stage, 3rd Block, Basaveshwarnagar, Bangalore 560 079 (IN).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: A TECHNIQUE FOR REDUCING PROCESSING POWER IN 3G SYSTEMS

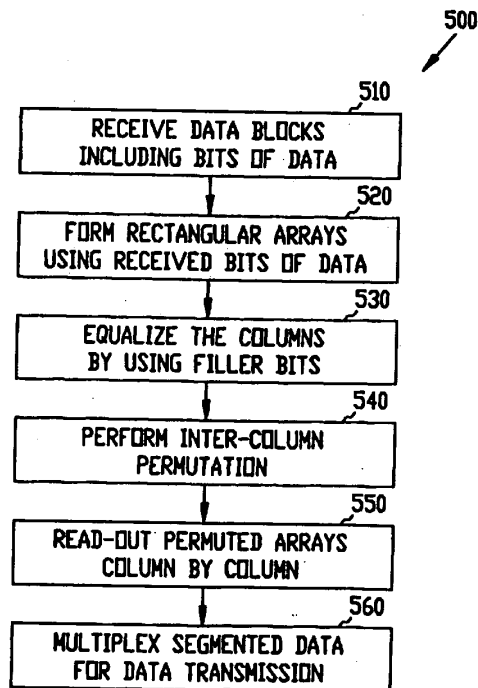

(57) Abstract: The present invention provides an improved transmitter for processing data blocks including bits of data coming from multiple transport channels in a transmitter of a radio communication system supporting variable data-rate transmissions. This is accomplished by using a computationally efficient technique for processing the received data blocks for variable data rate transmissions. The improved transmitter receives the data blocks including the bits of data from multiple transport channels. The transmitter then forms rectangular arrays including a predetermined number of columns and rows using the received bits of data such that the columns are based on a segmented radio frame size suitable for variable data-rate transmission. The transmitter then equalizes and interleaves the formed columns and reads out bits of data in the equalized and interleaved column-by-column. The transmitter then multiplex the read-out bits of data for variable data-rate transmissions.

WO 02/17549 A2